



Flanşlı iskele sistemi, döşeme altında taşıyıcı iskele veya cephelerde çalışma iskelesi olarak kullanılabilir.

Dış cephe uygulamalarında kullanılan flanşlı cephe iskele sistemi oldukça güvenli ve pratik bir iş ortamı sağlar.

Sistem dikey $\varnothing 48.3 \times 2.5$ mm $\varnothing 48.3 \times 2.5$ mm elemanlardan oluşur ve birinci sınıf TSE Belgeli sanayi borusundan imal edilir.

Yardımcı elemanlar olarakta ayar milleri, ayarlanabilir duvara sabitleme aparatları yan bağlantıları sağlayan 70 cm lik borular yahut kalastan yürüme platformları ve iskele içi merdivenler

Opsiyonel olarak farklı ölçü ve kalınlıklarda üretim yapılabilir.

Ringlock scaffolding system is for carrying slabs or as a facade operational scaffolding.

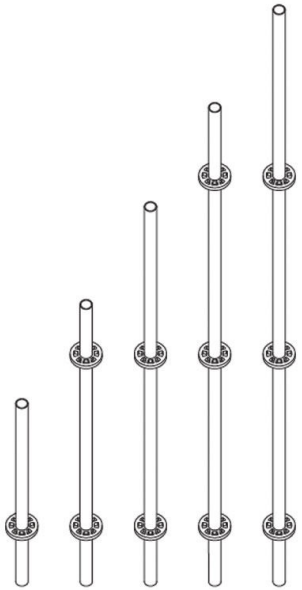
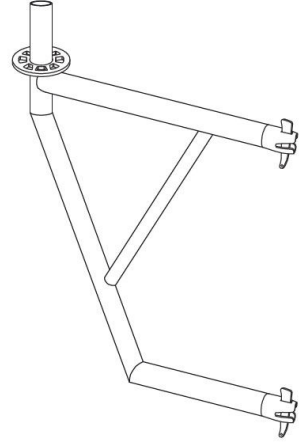
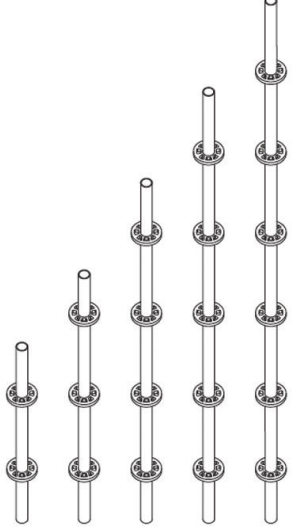
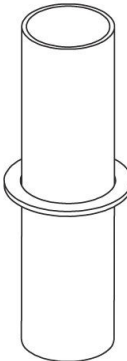
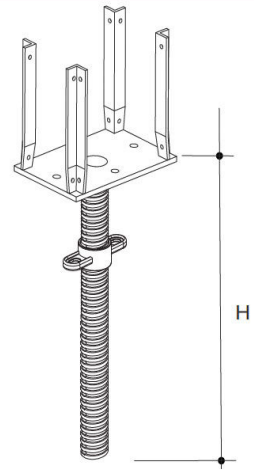
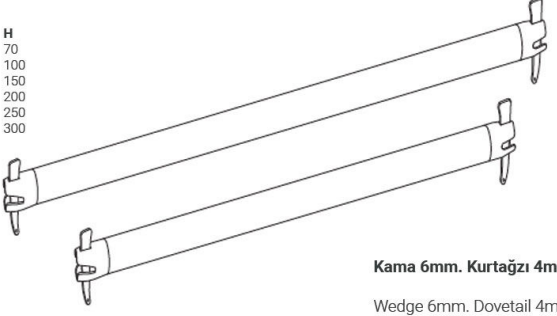
The ringlock facade scaffolding system used in facade applications provides a safe and practical working environment.

The system is comprised of $\varnothing 48.3 \times 2.5$ mm horizontal and $\varnothing 48.3 \times 2.5$ mm elements and they are produced using firstclass TSE certified industrial pipes.

Adjusting rods, adjustable fixing devices, 70-cm pipes providing side connections, walking platforms made of sheet steel or planks and stairways inside the scaffolding structure are used as

We can make a produce different size and thickness of the iron.

Flanşlı Kalıp Altı İskele Sistemi (Ringlock Scaffold Shoring System)

Ürün Kodu Product Code	Ağırlık Kg Weight Kg	Dikey Eleman (100 cm. flanş aralıklı) / Vertical Element (100 cm. flanged gap)	Ürün Kodu Product Code	Ağırlık Kg Weight Kg	Konsol / Console
ML0177 ML0178 ML0179 ML0180 ML0181	03,40 05,10 06,50 08,30 09,70	H 100 150 200 250 300 ø48 x 5mm Flanş Kalınlığı 8mm. Flange thickness 8mm. 	ML0193 ML0194	08,50 09,90	L 70 90 
					Birleştirme Elemanı / Connector
		Dikey Eleman (50 cm. flanş aralıklı) / Vertical Element (50 cm. flanged gap) Flanş Kalınlığı 8mm. Flange thickness 8mm. H 100 150 200 250 300 	ML0195	00,65	
ML0182 ML0183 ML0184 ML0185 ML0186	03,05 05,50 07,30 09,10 10,90				Ayarlanabilir Dört Yollu Başlık / Adjustable Four Ways Head
			ML0196 ML0197 ML0198	02,90 04,00 05,00	H 50 75 100 ø38 x 4mm 
		Yatay Eleman / Horizontal Element			Ayarlanabilir Alt Ayar Mili / Adjustable Base Plate
ML0187 ML0188 ML0189 ML0190 ML0191 ML0192	02,45 02,75 04,10 05,50 06,90 08,25	H 70 100 150 200 250 300 Kama 6mm. Kurtağı 4mm. Wedge 6mm. Dovetail 4mm. 	ML0199 ML0200 ML0201	02,70 03,80 04,80	H 50 75 100 ø38 x 4mm Güvenli kullanım için ayar elemanı min. 25cm içeride kalmalıdır. For security, when adjusting base spindles leave min. 25 cm inside. 